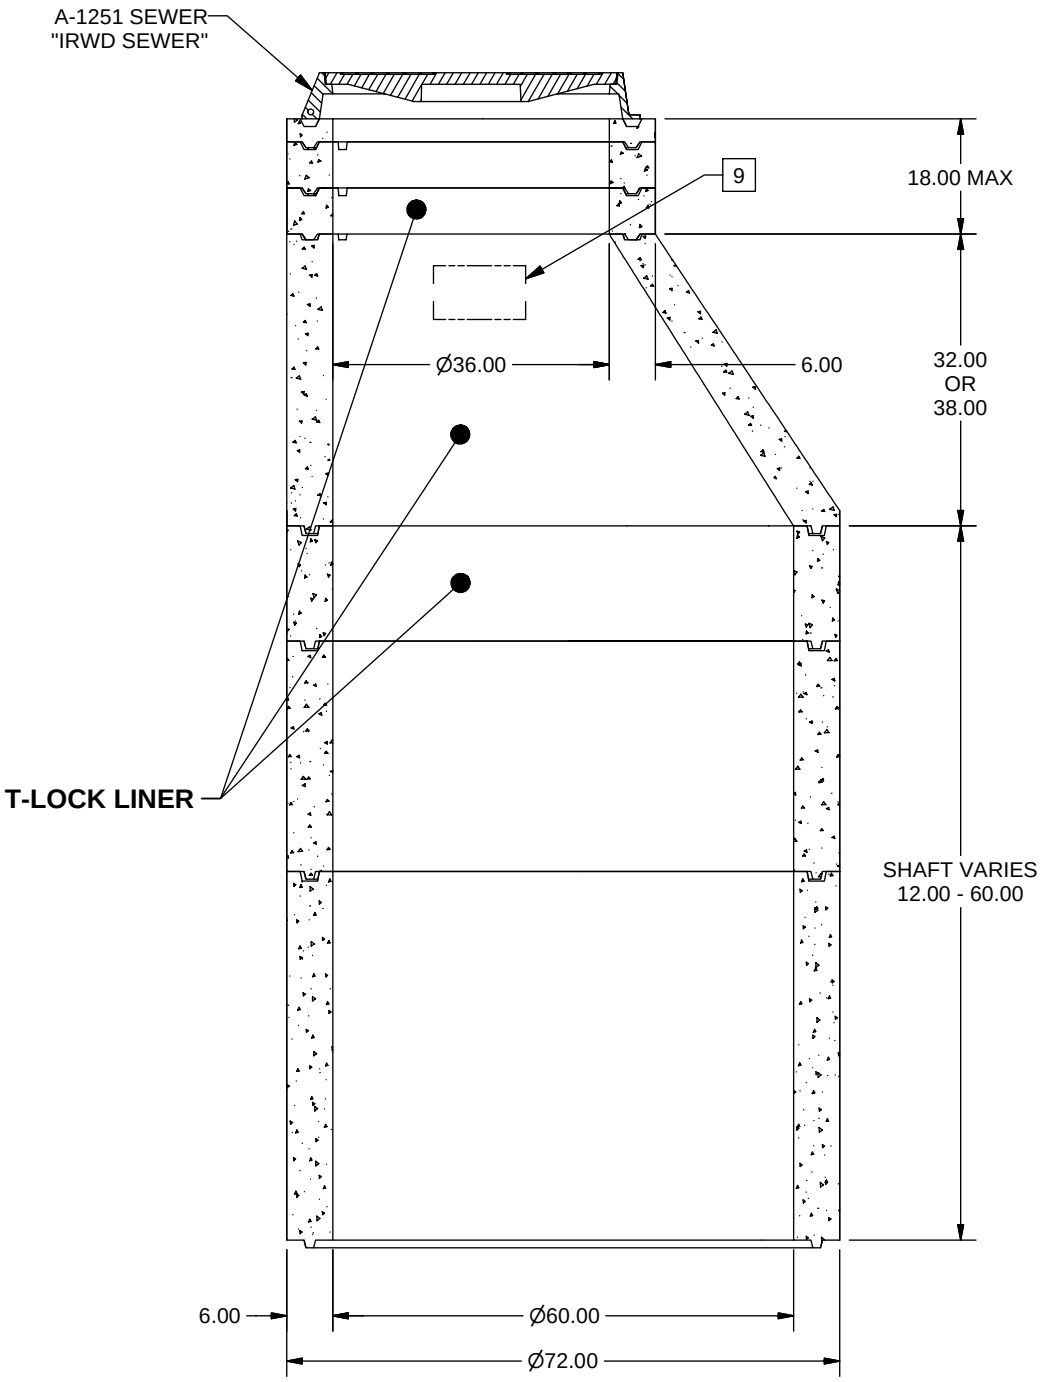

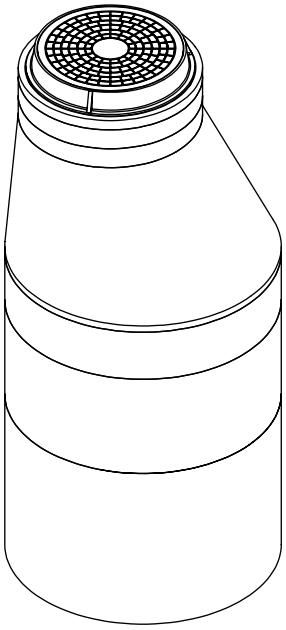

ISOMETRIC VIEW

NOTES: UNLESS OTHERWISE SPECIFIED.

1. ALL DIMENSIONS ARE IN DECIMAL INCHES.
2. PRECAST MATERIALS AND MANUFACTURING METHODS SHALL CONFORM TO ASTM C-478.
3. CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH F C= 4000 PSI AT 28 DAYS.
4. THE PORTLAND CEMENT USED IN THE PRECAST SECTIONS SHALL MEET THE REQUIREMENTS OF TYPE II/V HIGH SULFATE RESISTANT CEMENT IN ACCORDANCE WITH ASTM C-150.
5. RING AND COVER SHALL BE GREY CAST IRON CONFORMING TO ASTM A-48 CLASS 35B.
6. RING AND COVER A-1251 "IRWD SEWER".
7. PRE-CAST JOINTS SHALL BE SEALED USING MASTIC.
8. INTERIOR OF PRE-CAST SHAFTS AND CONE SHALL BE LINED WITH AMERON T-LOCK. ALL MATERIALS AND INSTALLATION SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.

9 STENCIL TEXT "xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx" APPROXIMATLY WHERE SHOWN.

PRECON PRODUCTS
Phone (805) 527-0841 Fax (805) 584-0769

TITLE: MANHOLE, 60 DIA, SHAFT, 36 RING & COVER, T-LOCK LINED (IRWD)

APPROVED BY	DATE	APPROVED BY	DATE	DRAWN BY	DATE	MODEL NO.	SH 1 OF 1
				F. ANSALDI	12/6/2005	MH6036T-IRWD	

H:\MH\MH_Std-Catalog\MH60_SHAFT-STDw36x38-noStep_IRWD_T-Lok.idw